


Two-Dimensional Metallic Pattern Meets Artistic Quartz Sand

Effect Wind stands out with its easy application, twodimensional metallic pearlescent e ect, and quartz sand structure, adding a sophisticated elegance to all interior spaces.

This acrylic emulsion-based coating features a unique textured structure and dynamic two-dimensional pearlescent e ects, adding depth and a sophisticated shine to any space.



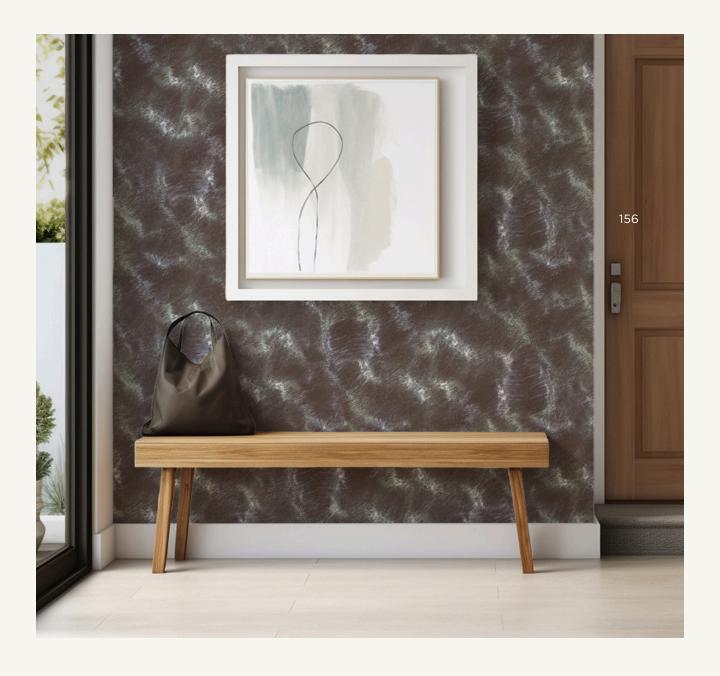

Effect Wind



Digital color samples are for illustrative purposes only. Please note that factors such as pearlescent reflections, light quality, and screen variations can significantly impact color perception. For accurate and precise color selection, we recommend referring to printed color charts.

Theoretical Consumption and Other Information



Effect Wind Undercoat

Depending on surface smoothness, absorbency, and application techniques, for a two-coat application:



The Consumption Amount (2 coat)

1 L covers 10.0 - 12.5 m2



Application Tool **Roller**



Number of Coats

2



Dilution

Dilutewith 5 - 10% clean water by volume



Packaging Sizes

1 L

Effect Wind

Applied over Effect Wind Undercoat. Depending on surface smoothness and application techniques, for a single coat application:



The Consumption Amount (1 coat)

1.2L(0.6L + 0.6 L) covers 10.0 - 12 m2



Application Tool

Double-Headed Brush



Number of Coats

1




Dilution

Readyto use



Packaging Sizes

1,2 L (0,6 L x 2)







 ${\it Unique\ Paint\ Unique\ Places}$

